

Block batteries / Motive Power

Product Overview



»Durability through
innovation«

Energy solutions

Always one step ahead

For GNB Industrial Power, innovation is more than just an word - it is the foundation of all our product development activities. Market and application oriented demands challenge our engineers on a daily basis. We are happy to meet this challenge and use our extensive knowledge to always provide our customers with the ideal solution.

By encouraging co-operation between our global experts, we are able to provide batteries, charging devices and complete systems to meet the needs of every application. This guarantees that you will always benefit from state-of-the-art technologies and comprehensive services when you work with GNB.

An excellent example of our innovative power is the conception of Sonnenschein dryfit® gel technology. Although this started out as a pure niche product, we quickly recognized its potential and successfully developed an extensive product range. Our newest gel block battery, Sonnenschein M, thus represents a further important milestone on this innovative path.

norwatt@norwatt.es

www.norwatt.es

| | |
|-------------------------|---------|
| Sonnenschein M | Page 4 |
| Sonnenschein GF - Y | Page 5 |
| Sonnenschein GF - V | Page 6 |
| MARATHON Classic FF | Page 7 |
| MARATHON Classic FT | Page 8 |
| drysafe & drysafe RECUP | Page 9 |
| 2100 Charger | Page 10 |
| Accessories | Page 11 |
| GNB online shop | Page 11 |



More than just block batteries



A global brand with an excellent reputation and technical image providing industrial batteries with market leading gel technology for all Motive Power applications. Sonnenschein was established in 1910 and the brand has grown to symbolise pre-eminent dryfit® technology worldwide.

MARATHON® Classic

MARATHON Classic formerly known as Classic, represents quality and durability in Motive Power applications with products that have been designed and manufactured with highest precision.

drysafe®

GNB® offers AGM batteries for traction applications under the drysafe® brand. A speciality of this range is the drysafe® RECUP batteries manufactured by GNB® – VRLA batteries with grids using a spiral wound design, which are characterized by high-current capability and micro cycles tolerance.



NEW!



Sonnenschein M

Discover the latest innovation from GNB® Industrial Power – Sonnenschein M, [roman: M = thousand] the first gel block battery offering 1,000 cycles. The Sonnenschein M features significant improvements in cyclic endurance which helps reducing your operating costs. Especially suited to cleaning machines, scooters, wheelchairs, the gel battery is a reliable choice, well proven over many years.

norwatt@norwatt.es

www.norwatt.es

dryfit® block batteries

Sonnenschein M (1,000 cycles gel battery)

Sonnenschein, with the robust and reliable dryfit® technology, takes the next step in product evolution: The innovative M technology which enables gel batteries to give 1,000 cycles at 70% depth of discharge.

With the experience of more than 120 years in battery manufacturing and continuous further development of the dryfit® gel technology, Sonnenschein managed to significantly extend the cycle life durability of gel batteries. The results are Sonnenschein M batteries with an excellent total cost of ownership for all traction purposes.



Main technical features and benefits:

- > Battery technology: VRLA (valve regulated lead-acid)
- > Maintenance-free (no topping up during the whole service life)
- > Very high intrinsic safety
- > Extremely robust and reliable
- > Low self-discharge rate
- > Up to 80% depth of discharge possible
- > 1,000 cycles in accordance with IEC 60254-1





NEW!

Technical characteristics and data

| Type | Nominal voltage V | Nominal capacity C ₅ (30 °C) Ah | Nominal capacity C ₂₀ (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight* | Terminal | Terminal position |
|-------------|----------------------|--|---|--------------------------|---------------------------|--------------------------|---------|------------|-------------------|
| GF 12 076 H | 12 | 76 | 86 | 330 | 171 | 236 | 28.8 | A-Terminal | 2 |

* The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque



Specifications




Nominal capacity
76 Ah (C₅)
86 Ah (C₂₀)



Block battery



Grid plate



1,000 cycles in accordance with IEC 60254-1



Recyclable



Valve regulated lead-acid battery



Proof against deep discharge



Maintenance-free (no topping up)



dryfit® block batteries

Sonnenschein GF-Y Range (dryfit® A500 cyclic)

The GF-Y block battery range is particularly suitable for the leisure and mobility market (wheelchairs, scooters, golf carts and electric boats).

Main technical features and benefits:

- > Battery technology: VRLA (valve regulated lead-acid)
- > Maintenance-free (no topping up during the whole service life)
- > Very high intrinsic safety
- > Robust, safe and reliable
- > Low self-discharge rate
- > 450 cycles in accordance with IEC 60254-1
- > Product range:
 - 12 V block batteries
 - 14 Ah up to 93,5 Ah (C₅)
 - 15 Ah up to 110 Ah (C₂₀)



norwatt@norwatt.es



www.norwatt.es

Technical characteristics and data

| Type | Nominal voltage V | Nominal capacity C ₅ (30 °C) Ah | Nominal capacity C ₂₀ (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight** kg | Terminal | Terminal position |
|--------------------|----------------------|--|---|--------------------------|---------------------------|--------------------------|----------------|------------|-------------------|
| GF 12 014 Y F | 12 | 14.0 | 15.0 | 181 | 76.0 | 167 | 6.00 | G-M5 | 3 |
| GF 12 022 Y F | 12 | 22.2 | 24.0 | 167 | 176 | 126 | 9.60 | G-M5 | 3 |
| GF 12 025 Y G | 12 | 25.0 | 28.0 | 197 | 132 | 180 | 11.1 | G-M5 | 2 |
| GF 12 033 Y 1 | 12 | 32.5 | 38.0 | 210 | 175 | 175 | 14.6 | A-Terminal | 3 |
| GF 12 033 Y G1*/G2 | 12 | 32.5 | 38 | 210 | 175 | 175 | 14.6 | G-M6 | 3 |
| GF 12 040 Y | 12 | 40 | 48 | 242 | 175 | 190 | 17.5 | A-Terminal | 3 |
| GF 12 044 Y | 12 | 44 | 50 | 261 | 135 | 230 | 19 | A-Terminal | 3 |
| GF 12 051 Y 1/ 2* | 12 | 51 | 56 | 278 | 175 | 190 | 20.8 | A-Terminal | 3 |
| GF 12 051 Y G1 | 12 | 51 | 56 | 278 | 175 | 190 | 20.8 | G-M6 | 3 |
| GF 12 052 Y 0 | 12 | 52.7 | 60 | 261 | 170 | 178 | 19.8 | F-M6 | 2 |
| GF 12 063 Y 0 | 12 | 63 | 70 | 261 | 171 | 210 | 23 | F-M6 | 2 |
| GF 12 065 Y* | 12 | 65 | 78 | 353 | 175 | 190 | 26.8 | A-Terminal | 3 |
| GF 12 072 Y | 12 | 72 | 80 | 330 | 171 | 236 | 30 | A-Terminal | 2 |
| GF 12 094 Y | 12 | 93.5 | 110 | 286 | 269 | 230 | 38.5 | A-Terminal | 1 |

* with hold down ** The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque

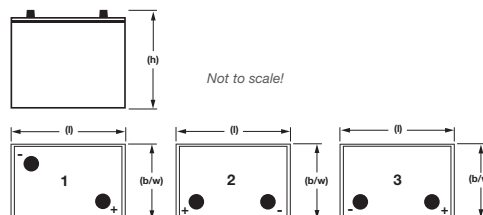

Specifications

| | | | | | | | |
|--|---------------|------------|---|------------|-------------------------------------|------------------------------|----------------------------------|
| | | | | | | | |
| Nominal capacity 14 - 93,5 Ah (C ₅) 15 - 110 Ah (C ₂₀) | Block battery | Grid plate | 450 cycles in accordance with IEC 60254-1 | Recyclable | Valve regulated lead-acid batteries | Proof against deep discharge | Maintenance-free (no topping up) |



dryfit® block batteries

Sonnenschein GF-V Range (dryfit® traction block)

The GF-V block battery range is designed for hard industrial use. This includes applications such as cleaning machines, pallet trucks, automatic guided vehicles, mobile elevating work platforms, electric cars and buses.

Main technical features and benefits:

- > Battery technology: VRLA (valve regulated lead-acid)
- > Maintenance-free (no topping up during the whole service life)
- > Very high intrinsic safety
- > Robust, safe and reliable
- > Low self-discharge rate
- > 700 cycles in accordance with IEC 60254-1
- > Product range:
 - 6 V and 12 V block batteries
 - 50 Ah up to 240 Ah (C₅)
 - 55 Ah up to 270 Ah (C₂₀)





Technical characteristics and data

| Type | Nominal voltage V | Nominal capacity C ₅ (30 °C) Ah | Nominal capacity C ₂₀ (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight kg | Terminal* | Terminal position |
|---------------|----------------------|--|---|--------------------------|---------------------------|--------------------------|--------------|------------|-------------------|
| GF 06 160 V1 | 6 | 160 | 196 | 246 | 192 | 275 | 29.0 | A-Terminal | 1 |
| GF 06 180 V | 6 | 180 | 200 | 246 | 192 | 275 | 31.0 | A-Terminal | 1 |
| GF 06 180 V Q | 6 | 180 | 200 | 246 | 192 | 284 | 31.5 | F-M10 | 1 |
| GF 06 240 V | 6 | 240 | 270 | 311 | 183 | 358 | 47.0 | A-Terminal | 1 |
| GF 12 050 V | 12 | 50.0 | 55.0 | 278 | 175 | 190 | 19.0 | A-Terminal | 3 |
| GF 12 050 V G | 12 | 50.0 | 55.0 | 278 | 175 | 190 | 19.0 | G-M6 | 3 |
| GF 12 076 V | 12 | 76 | 86 | 330 | 171 | 236 | 28.8 | A-Terminal | 2 |
| GF 12 090 V | 12 | 90 | 98 | 513 | 189 | 219 | 36.5 | A-Terminal | 4 |
| GF 12 105 V | 12 | 105 | 120 | 345 | 174 | 283 | 37.5 | A-Terminal | 3 |
| GF 12 110 V | 12 | 110 | 120 | 513 | 223 | 219 | 45.5 | A-Terminal | 4 |
| GF 12 160 V | 12 | 160 | 196 | 518 | 274 | 238 | 62.5 | A-Terminal | 4 |

* The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque

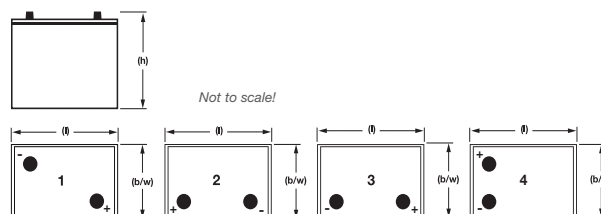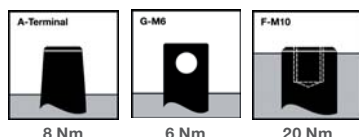

Specifications

- Nominal capacity
 50 - 240 Ah (C₅)
 55 - 270 Ah (C₂₀)
- Block battery
- Grid plate
- 700 cycles in accordance with IEC 60254-1
- Recyclable
- Valve regulated lead-acid batteries
- Proof against deep discharge
- Maintenance-free (no topping up)



VRLA block batteries

AGM technology range / drysafe and drysafe RECUP

AF Range (AGM Technology)


The AF battery range is suitable for all light traction applications and combines favorable investment costs with no maintenance over the entire service life.



NEW!

Main technical features and benefits:

- > Battery technology: VRLA (valve regulated lead-acid)
- > Maintenance-free (no topping up during the whole service life)
- > 300 cycles in accordance with IEC 60254-1



11 Nm

Technical characteristics and data


| Type | Nominal voltage V | Nominal capacity C ₅ (30 °C) Ah | Nominal capacity C ₂₀ (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight* kg | Terminal |
|---------------|----------------------|--|---|--------------------------|---------------------------|--------------------------|---------------|----------|
| AF 06 190 XOS | 6 | 190.5 | 210.0 | 309 | 172 | 223 | 32.6 | F-M6 |
| AF 12 056 XOS | 12 | 56.0 | 60.8 | 220 | 172 | 219 | 22.5 | F-M6 |
| AF 12 064 XOS | 12 | 63.5 | 76.2 | 262 | 172 | 223 | 27.7 | F-M6 |
| AF 12 090 XOS | 12 | 89.5 | 100.4 | 309 | 172 | 223 | 32.8 | F-M6 |

* The weights may exhibit a tolerance of +/-5%


drysafe®

AS Range with spiral wound technology


The AS range is suitable for all applications with a high power demand (discharge currents and charge acceptance), like hybrid drive and automatic guided vehicle systems. Additionally, AS-batteries offer excellent micro-cycle durability for applications with high opportunity charge rates, for example cleaning machines.



8 Nm



8/ 37 Nm



11Nm

Main technical features and benefits:

- > VRLA battery with grids in a spiral wound design
- > Maintenance-free (no topping up during the whole service life)
- > Superior high power performance (discharge and charge acceptance)
- > Good high power performance at low temperature
- > Ideal for opportunity charging and fast charging
- > Excellent micro-cycle durability, especially at partial state of charge
- > Vibration resistant
- > 450 cycles in accordance with IEC 60254-1

Technical characteristics and data

| Type | Nominal voltage V | Nominal capacity C ₅ (30 °C) Ah | Nominal capacity C ₂₀ (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight* kg | Terminal |
|-------------|----------------------|--|---|--------------------------|---------------------------|--------------------------|---------------|-----------------|
| AS 12 045 R | 12 | 45.0 | 50.0 | 260 | 171 | 206 | 18.5 | Stud/A-Terminal |
| AS 12 050 C | 12 | 45.0 | 50.0 | 260 | 170 | 206 | 17.5 | A-Terminal |
| AS 06 024 C | 6 | 22.0 | 24.0 | 65.0 | 175 | 190 | 4.7 | F-M6 |

* The weights may exhibit a tolerance of +/-5%

drysafe®
RECUP

Block batteries with tubular plates

MARATHON Classic FT Range

The FT block battery range is designed for applications in harsh environments such as golf carts, cleaning machines, mobile elevating work platforms and electric elevating platform trucks.

Main technical features and benefits:

- > Battery technology: Vented / tubular plates
- > Extremely robust and reliable
- > 900 cycles in accordance with IEC 60254-1
- > Product range:
 - 6 V and 12 V block batteries
 - 52 Ah up to 200 Ah (C_5)
 - 62 Ah up to 235 Ah (C_{20})





Technical characteristics and data

| Type | Nominal voltage V | Nominal capacity C_5 (30 °C) Ah | Nominal capacity C_{20} (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight* kg | Terminal | Terminal position |
|-------------|----------------------|---|--|--------------------------|---------------------------|--------------------------|---------------|------------|-------------------|
| FT 06 180 1 | 6 | 180 | 210 | 246 | 190 | 276 | 29.0 | A-Terminal | 1 |
| FT 06 180 2 | 6 | 180 | 210 | 265 | 184 | 269 | 29.0 | A-Terminal | 1 |
| FT 06 200 | 6 | 200 | 235 | 265 | 185 | 269 | 32.0 | A-Terminal | 1 |
| FT 12 110 | 12 | 110 | 132 | 347 | 176 | 285 | 39.0 | A-Terminal | 3 |

* The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque

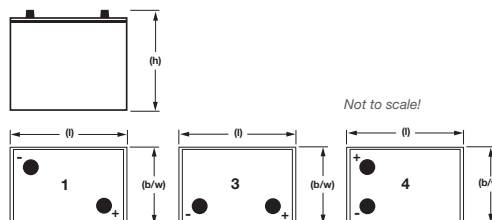

Specifications

Nominal capacity
52 - 200 Ah (C_5)
62 - 235 Ah (C_{20})

Block battery

Tubular plate

900 cycles in accordance with IEC 60254-1

Recyclable

Block batteries with grid plates MARATHON Classic FF Range

The MARATHON Classic FF-range battery is suitable for mobile elevating work platforms, cleaning machines, leisure and many other Motive Power applications due to its high rate discharge capability.

Main technical features and benefits:

- > Battery technology: Vented / grid plates
- > Good high rate discharge capability
- > 300 cycles in accordance with IEC 60254-1
- > Product range:
 - 6 V and 12 V block batteries
 - 40 Ah up to 296 Ah (C₅)
 - 50 Ah up to 380 Ah (C₂₀)





Technical characteristics and data

| Type | Nominal voltage V | Nominal capacity C ₅ (30 °C) Ah | Nominal capacity C ₂₀ (30 °C) Ah | Length (l) max. mm | Width (b/w) max. mm | Height (h) max. mm | Weight* kg | Terminal | Terminal position |
|-------------|----------------------|--|---|--------------------------|---------------------------|--------------------------|---------------|------------------|-------------------|
| FF 06 200 1 | 6 | 200 | 235 | 246 | 190 | 272 | 32.0 | A-Terminal | 1 |
| FF 06 200 2 | 6 | 200 | 235 | 265 | 184 | 269 | 29.0 | A-Terminal | 1 |
| FF 06 255 | 6 | 255 | 285 | 313 | 184 | 355 | 49.0 | A-Terminal | 1 |
| FF 06 284 R | 6 | 296 | 380 | 316 | 182 | 434 | 50.4 | Stud/ A-Terminal | 1 |
| FF 12 040 | 12 | 40.0 | 50.0 | 210 | 175 | 190 | 13.7 | A-Terminal | 3 |
| FF 12 050 | 12 | 50.0 | 62.0 | 242 | 175 | 190 | 17.3 | A-Terminal | 3 |
| FF 12 060 | 12 | 60.0 | 75.0 | 278 | 175 | 190 | 20.7 | A-Terminal | 3 |
| FF 12 080 1 | 12 | 80.0 | 100 | 353 | 175 | 190 | 26.4 | A-Terminal | 3 |
| FF 12 080 2 | 12 | 80.0 | 100 | 349 | 175 | 235 | 29.2 | A-Terminal | 3 |
| FF 12 085 | 12 | 85.0 | 110 | 328 | 174 | 216 | 27.0 | A-Terminal | 2 |
| FF 12 105 | 12 | 105 | 125 | 513 | 189 | 223 | 34.5 | A-Terminal | 4 |
| FF 12 110 | 12 | 110 | 130 | 349 | 175 | 285 | 32.0 | A-Terminal | 3 |
| FF 12 135 | 12 | 135 | 180 | 513 | 223 | 223 | 47.8 | A-Terminal | 4 |
| FF 12 144 R | 12 | 148 | 200 | 393 | 180 | 364 | 49.4 | Stud/A-Terminal | 2 |

* The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque

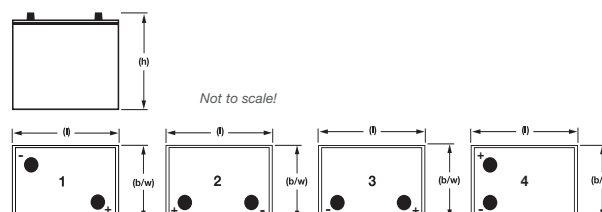

Specifications

| | | | | | |
|---|---------------|------------|---|------------|----------------------------------|
| | | | | | |
| Nominal capacity 40 - 296 Ah (C ₅) 50 - 380 Ah (C ₂₀) | Block battery | Grid plate | 300 cycles in accordance with IEC 60254-1 | Recyclable | Special high current performance |



Chargers

2100 SP

GNB[®] charger range

Incorporating the latest technology, these high frequency chargers are the ideal choice to recharge batteries on small electric vehicles, cleaning machines and pallet trucks. Suitable for flooded or valve regulated blocs and batteries, their design ensures reliability, safety, ease of use and optimal charging. These highly efficient chargers are reduced in size and weight, making them very easy to install and handle.



Your benefits:

- > **Efficiency optimisation:**
 - > GNB's unique charger profiles and **dv/dt** charging time termination avoid any risk of under or over charging, therefore optimising battery usage and life
 - > The charger ensures that the charging current and voltage remain constant during any mains fluctuations, guaranteeing a constant and optimised charging time
- > **Very high energy efficiency due to HF technology – small CO₂ footprint**
- > **Modern charging technology at an affordable price**
- > **Easy-to-use automatic start - "plug & play"**
- > **Small and light – requires less installation space**
- > **Simple and comprehensible charging display (red-yellow-green)**
- > **Integral wall mounting**
- > **Ready for fleet management 2100.net**

